

Floor Mount Unit Draining

Applicable Models: iQ751, iQ1001, iQ1501

1

Turn the unit off at both rocker switches, turn the unit back on for about 8 to 10 seconds then turn the unit back off at the rocker switches and power off the breaker feeding the unit.



(This forces open all water valves that can open. This will allow the unit to drain completely.)

3

Using the T&P Relief valve, release any excess pressure inside the unit.



2

Isolate the unit by closing off the **inlet** and **outlet** isolation valves.



4

Unscrew the 3/4" cap on the inlet side of the unit, and attach the garden hose to the open port, and let the water drain out.




Floor Mount Unit Pressurization

Applicable Models: iQ751, iQ1001, iQ1501

1

Ensure that the drain port cap is reinstalled with new PTFE tape.

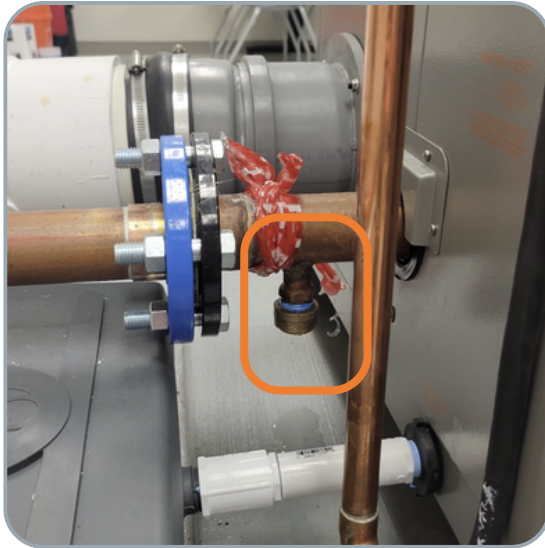

2

Slowly open the **outlet** isolation valve, then slowly open up the **inlet** isolation valve. Then, using the **T&P** Relief valve, release any excess pressure inside the unit.



3

Using a flat head screwdriver loosen the bleed screw on the pump about 3 turns, and let any air bleed out of the pump. Be prepared with some rags as water may drip out.



4

Inspect all connections for leaks, and then power the unit back on and close up the bleed screw on the pump.

