



COMMERCIAL

The Legionator™

WORLD'S FIRST POINT-OF-USE TANKLESS DISINFECTION DEVICE

The Legionator heats and disinfects water simultaneously. A set of high-quality quartz tubes heats water to a comfortable temperature on-demand. As the water is exiting the unit, ozone (a highly effective disinfectant) is injected into the water. This has two effects:

- (1) It disinfects the bacteria in water.
- (2) The ozone is then carried in the water to the faucets and helps mitigate the bacteria present in the faucet valve seats and aerators.
- Automatic Ozonation Helps decontaminate automatic faucets from pathogens by dosing at appropriate intervals
- Scale-resistant Infrared Heating Quartz tubes heat water using Infrared technology which combats scale formation.
- Efficient and Healthy Due to its tankless design, the Legionator does not store water; thereby delivering endless clean water on-demand and saving energy.
- Space Saving Install under a sink or in a nearby closet.
 ADA Compliant
- **Built-in Ozone Generator -** The unit generates ozone from ambient air using on-board power and does not require any refills.
- Precise Metering Ensures the correct amount of ozone is added at any flow rate




Legionator iL6.0

Legionator™ Specifications

PARAMETER	MODELS	
ELECTRICAL	i L 3.5	iL 6.0
Supply Voltage	120 Vac, Single Phase	208 Vac, Single Phase
Power Rating	3.5 kW	6 kW
Current Draw (Max)	29 Amperes	29 Amperes
PERFORMANCE	iL 3.5	iL 6.0
Activation Flow Rate	0.2 GPM	
Min Set Point Temp	100 °F	
Max Set Point Temp	120 °F	
Min Operating Pressure	30 psi	
Max Operating Pressure, psi	150 psi	
PHYSICAL	iL 3.5	iL 6.0
Height (Inches)	14.5"	
Width (Inches)	4.5"	
Depth (Inches)	6"	
Weight (lbs)	7 lbs	
PLUMBING	iL 3.5	iL 6.0
Water In/Out Connection Size	3/8" Compression	
Plumbing Orientation	Inlet/Outlet on the Right Side	



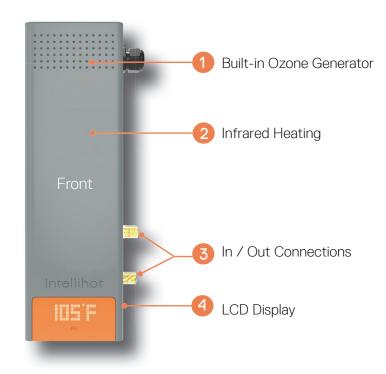



www.intellihot.com

Intellihot Inc. 2900 W. Main Street Galesburg, IL 61401 Phone: 877.835.1705 Email: sales@intellihot.com



technical specifications are subject to change without notice. Version 2.24